


EXTERNAL UNLOADER CONVERSION KIT

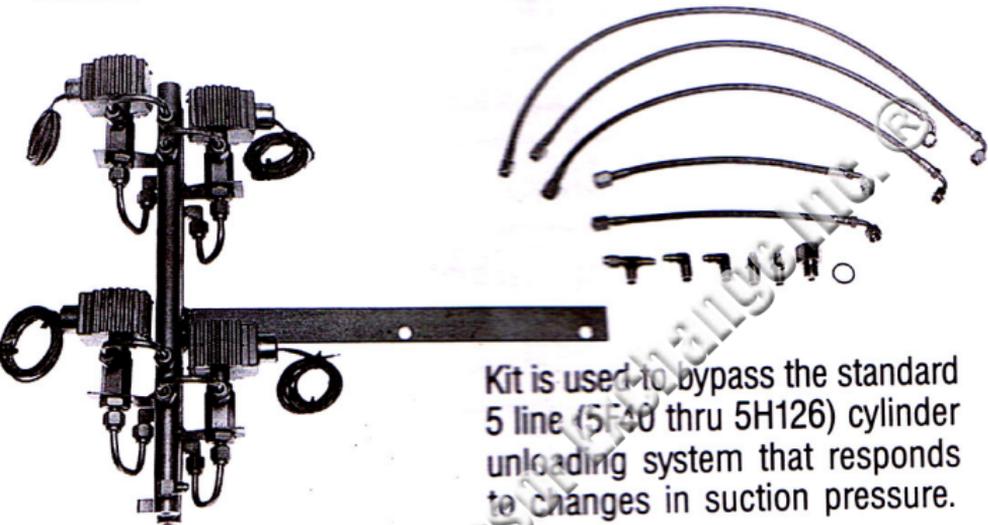

Kit is used to bypass the standard 5 line (5F40 thru 5H126) cylinder unloading system that responds to changes in suction pressure.

A field supplied controller is used in conjunction with this kit to control solenoid valves that activate/deactivate cylinder unloaders. External capacity control results in more precise compressor capacity matching to the load.

COMPRESSOR MODEL	RCD P/N	COMPRESSOR MODEL	RCD P/N
5F40	5F40-4FI	5H60,66,80,86	5H60-4FI
5F60	5F60-4FI	5H120,126	5H120-4FI
5H40,46	5H40-4FI		

5F Kits contain hand hole cover.
5H Kits contain blankoff plates.
120 volt solenoid coils.